

2.5 kW 3.5 kW 5.4 kW 7.1 kW 8.0 kW 9.0 kW



(Coming Soon)



ConnectLife

X4 Split System


The X4 Series split system range delivers smarter performance, cleaner air, and a refined design. Reaffirming our commitment to Better Air, the X4 introduces advanced air purification features to elevate home comfort. It features the powerful Self-Clean Pro technology alongside an innovative 4 in 1 Filter System. This specialised filtration combines a Silver Ion Filter, Aromatic Filter, HEPA Filter, and Catechin-Coated Filter to effectively remove all kinds of dust and odour in the air, refreshing your indoor air and providing a healthier living environment for your family.

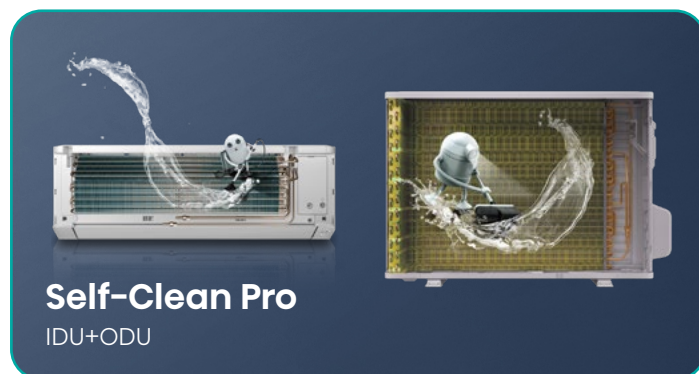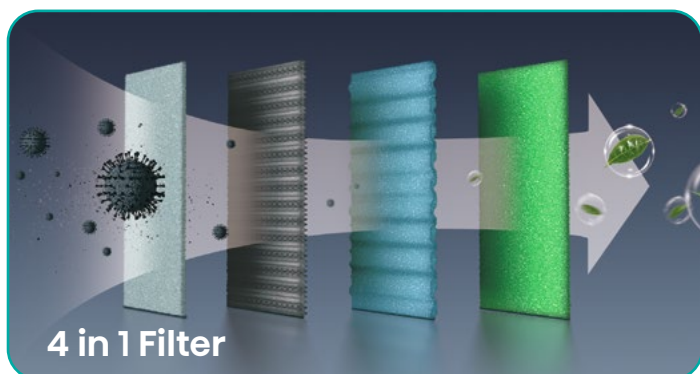


High Energy Efficiency



Self-Clean Pro
IDU + ODU



4 in 1 Catechin
Filter



Matte Finish



Wi-Fi & Voice
Control



Easy
Installation




Easy Clean




Geofencing




ODU Full
DC Inverter



ODU
Golden Fin



ODU PCB with
Insect Prevention




ODU 7 Layer
Anti-Corrosion
Protection

X4 Series Specifications

Set Model		HAWK25KR	HAWK35KR	HAWK50KR	HAWK71KR	HAWK80KR
Indoor Unit Model		HAWK25KR-I	HAWK35KR-I	HAWK50KR-I	HAWK71KR-I	HAWK80KR-I
Outdoor Unit model		HAWK25KR-O	HAWK35KR-O	HAWK50KR-O	HAWK71KR-O	HAWK80KR-O
Performance						
Cooling Capacity	W	2500(800-3100)	3500(1200-3700)	5400(1500-5600)	7100(2000-7100)	8000(2600-8600)
Heating Capacity	W	3000(1000-3800)	3800(1000-4300)	5400(1400-5900)	7200(2000-7300)	8500(2300-9600)
Input-Cooling	W	625(150-1100)	900(240-1200)	1550(320-2100)	2180(450-2700)	2400(480-3000)
Input-Heating	W	690(180-1300)	920(210-1350)	1350(290-2150)	2050(430-3000)	2450(510-3600)
Moisture Removal	L/H.r	0.9	1.2	1.5	2.0	2.5
Air Circulation	l/s	172	172	250	306	306
EER	W/W	4.000	3.889	3.484	3.257	3.333
COP	W/W	4.348	4.130	4.000	3.512	3.469
AEER	W/W	3.957	3.860	3.469	3.247	3.324
ACOP	W/W	4.306	4.100	3.980	3.501	3.460
TCSPF (HOT)	W/W	5.066	4.967	4.685	4.402	4.592
HSPF (HOT)	W/W	4.847	4.190	4.598	4.459	4.282
TCSPF (In Average)	W/W	4.682	4.651	4.432	4.189	4.374
HSPF (In Average)	W/W	4.424	3.912	4.175	3.870	3.819
TCSPF (Cold)	W/W	4.792	4.783	4.621	4.376	4.585
HSPF (Cold)	W/W	3.863	3.473	3.677	3.307	3.374
Energy Star Rating for Cooling New-HOT		3.5	3.0	3.0	2.5	3
Energy Star Rating for Heating New-HOT		3.0	2.5	3.0	2.5	2.5
Energy Star Rating for Cooling New-Average		3.0	3.0	2.5	2.5	2.5
Energy Star Rating for Heating New-Average		2.5	2.0	2.5	2.0	2
Energy Star Rating for Cooling New-Cool		3.0	3.0	3.0	2.5	3
Energy Star Rating for Heating New-Cool		2.0	1.5	2.0	1.5	1.5
Refrigerant (Type/kg)		R32/0.59	R32/0.61	R32/0.8	R32/0.97	R32/1.53
Indoor Unit Noise Level (Sound Pressure)	High(dB (A))	39	39	45	46	46
	Silent(dB (A))	25	26	32	32	32
Outdoor Unit Noise Level (Sound Pressure)	dB (A)	53	54	55	57	62
Outdoor Unit Noise Level (Sound Power)	dB (A)	60	62	65	65	70
Power Supply						
Voltage, Frequency, Phase		220-240V/50Hz-1Ph				
Current	Cooling(Amp.)	2.8(0.7-5.5)	4.1(1.8-6.0)	7.0(1.5-10.5)	9.5(1.8-13.8)	10.6(1.8-17)
	Heating(Amp.)	3.1(0.8-6.5)	4.2(1.6-7.0)	6.1(1.4-10.8)	9(1.6-15.2)	10.9(1.9-19)
Voltage Range	V	187V-270V	187V-270V	187V-270V	187V-270V	187V-270V
System						
Compressor Type		Rotary				
Connecting Pipe Diameter						
Liquid Pipe	inch	1/4				
Gas Pipe	inch	3/8		1/2		5/8
Other						
Maximum Piping Length/ Height	m	20/10	25/10	30/20	30/20	40/20
Pre Charge Length	m	15M				
Net Dimensions WxHxD (mm)	Indoor Unit	852×291×205	852×291×205	972X300X229	1076×320×235	1076X320X235
	Outdoor Unit	785×540×260	785×540×260	810x585x280	860×649×310	900×750×340
Net Weight (kg)	Indoor Unit	9	9	11.5	13	13
	Outdoor Unit	25	27	33	42	51
Packing Dimensions WxHxD (mm)	Indoor Unit	910×360×265	910×360×265	1040X365X310	1170×390×315	1170X390X315
	Outdoor Unit	910×600×360	910×600×360	940x630X385	995×705×420	1060×820×450
Gross Weight (kg)	Indoor Unit	11	11	14	15.5	15.5
	Outdoor Unit	27.5	29.5	36	45	55
Cooling Temperature	℃	-10-50				
Heating Temperature	℃	-15-24				

Model Number	HACW02	RCH-RSY5-0
Product Name	Wired Controller*	Remote Controller
Product Picture		
Dimension (WxHxD)	120mm x 120mm x 19mm	44mm x 175mm x 15mm
Screen Dimension	3.2 inch	1.75 inch
Temperature Setting Range	16~30°C	
Power Supply	DC 12V	2 x AAA batteries
Key Features	• Same cable as the touch screen controller for an easy upgrade • 7-Day programmable	• I Feel • AI Smart Mode • Self-Clean Pro

*The HACW02 controller is optional.



For More Information
Check Out Our Website!

